

## 4 CH/8 CH HD Analog Digital Video Recorder




### Key Features

- 4 CH (CJ-HDR104A)/8 CH (CJ-HDR108A) with 720P/1080P recording playback and live view
- H.264 video compression
- HDMI/VGA simultaneous video output
- Supports 1 SATA HDD up to 8TB, 2 USBs
- Digital zoom during live & playback
- iPhone, iPad, Android

### Standard Accessories

- Quick Start Guide.....1 pc
- Important Safety Instructions.....1 pc
- CD .....1 pc

### Appearance

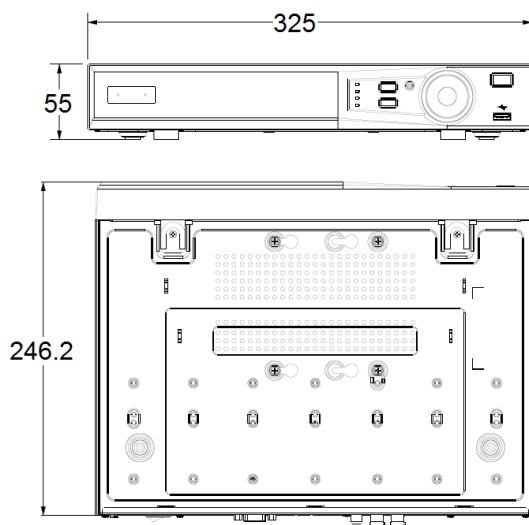

### Specifications

Model		CJ-HDR104A	CJ-HDR108A
Video/Audio IF			
Video Input		4 CH, BNC	8 CH, BNC
Type	HDCVI	720P/1080P	
	Analog	PAL/NTSC	
Video Output		1 HDMI, 1 VGA	
Audio Input		1 CH, RCA	
Audio Output		1 CH, RCA	
Two-way Talk		Reuse audio input/output CH 1	
Display			
Output Resolution		1920×1080, 1280×1024, 1280×720, 1024×768	
Multiscreen Mode		1/4	1/4/8/9
Privacy Masking		4 rectangular zones (each camera)	
OSD		Camera title, Time, Video loss, Camera lock, Motion detection, Recording	
Video/Audio Format			
Video/Audio Compression		H.264/G.711a	
Record Rate*	Main Stream	1280*1440/1080P/1080N/720P/960H/D1/HD1/BCIF/CIF/QCIF (1~25/30fps)	
	Sub Stream	D1/CIF/QCIF (1~15fps)	
Bit Rate		1Kbps~6144Kbps per channel	
Record Mode		Manual, Schedule (Regular, Continuous), Alarm, MD, Stop	
Record Interval		1~60 min (default: 60 min), Pre-record: 0~30 sec, Post-record: 10~300 sec	
Alarm/Event			
Trigger Events		Recording, PTZ, Tour, Email, FTP, Snapshot, Buzzer, Show Message, Alarm Upload and Log	
Video Detection		Motion Detection, MD Zones: 396 (22x18)/330 (22x15), Video Loss, Tampering	
Playback & Backup			
Sync Playback		1/4	1/4/9
Search Mode		Time/Date, Alarm, MD and Exact search (accurate to second)	
Playback Functions		Play, Pause, Stop, Rewind, Fast play, Slow play, Next file, Previous file, Next camera, Previous camera, Full screen, Repeat, Shuffle, Backup selection, Digital zoom, Customized playback, Splice playback	
Backup Mode		USB Device/Network	
Network			
Network Interface		RJ-45 port (100M)	
Network Functions		HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, DDNS, FTP, SNMP, EZ Remote	
Max. User Access		128 users	
Mobile Device		iPhone, iPad, Android	
HDD			
Type		1 SATA port, up to 8TB	
External Interface			
USB Interface		2 ports (1 rear), USB2.0	
RS485 Camera Interface		1 port, for PTZ Control	
General Specifications			
Power Supply		DC12V/2A	
Power Consumption		<10W (without HDD)	
Working Environment		-10°C~+55°C/0%~90%RH	
Dimension (W×D×H)		Mini 1U, 325mm×257.15mm×55mm	
Weight		1.16ka (without HDD)	1.20ka (without HDD)

- For channel 1 and channel 5 (CJ-HDR108A only), the change of the frame rate to 16fps or more at 1080P and above, will update the frame rate settings of other channels to 15fps.

- Recommended to schedule a weekly reboot.

### Important

- Safety Precaution: Carefully read the user's manual before using this product.

- All pictures are simulated.
- Weights and dimensions are approximate.
- Specifications are subject to change without notice.
- These products may be subject to export control regulations.

DISTRIBUTED BY:

Lintas Sarana Telekomunikasi  
www.linstel.co.id Telp. 021 22210366 / 0812-8988-3330